

Harry H. Tsugawa ASLA
Landscape Architect
133 Calvin Place
Santa Cruz California 95060

Phone: 408/423 2417


Project
 PLAY AREA RENOVATION PLANS
ORCHARD GARDENS PARK
 GARNER DRIVE
 DEPARTMENT OF PARKS & RECREATION
 CITY OF SUNNYVALE

PLAY AREA NO. 1
 BASE BID
 Revision:
 Date: 1/15/90
 Certificate No. 1077
 Sheet
3 of 4


ORCHARD GARDENS PARK
 PLAY AREA NO. 1
 BASE BID

CONSTRUCTION NOTES:

1. Verify the locations and depths of any existing subsurface utilities, services and drainage facilities that may be in conflict with the placement of the new play equipment. The Contractor shall be responsible for the repair and/or replacement of any existing utilities, services or drainage facilities damaged due to failure on the part of the Contractor to verify the locations and depths of such items.
2. Clear all existing firbark from work areas as required to allow the installation of the play equipment without contamination of the firbark, and stockpile to the side of the play area for replacement after installation of the play equipment. Stockpile only clean firbark, free of soil, debris and other contaminants. Dispose of any contaminated firbark off of the site.
3. Install the new play equipment in strict accordance with the manufacturer's specifications. Tops of all concrete footings are to be at proper depths and the top corners of all footings are to be rounded to a 2 inches minimum radius.
4. Concrete for footings shall be Class A, six (6) sacks concrete.
5. At completion of the installation of the play equipment, establish proper subgrades in the play area as required for the proper depth of firbark, and cleaned of all rocks, debris and contaminated firbark, and dispose of same off of the site.
6. Replace stockpiled firbark around play equipment. Contractor shall include in the Base Bid, additional quantities of matching firbark as required to provide for a 12 inches minimum depth of firbark in Play Area No. 1 in the event that Add Alternate #1 is not exercised.

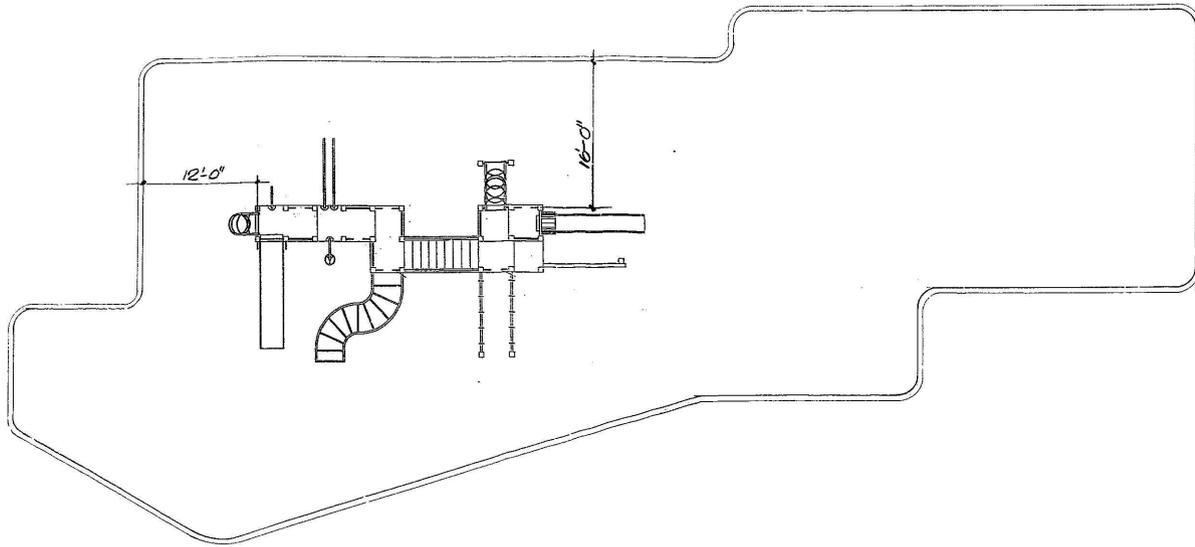

(A) **3** **DETAIL PLAN: PLAY AREA 1 (BASE BID)**
 SCALE: 1/8" = 1'-0"

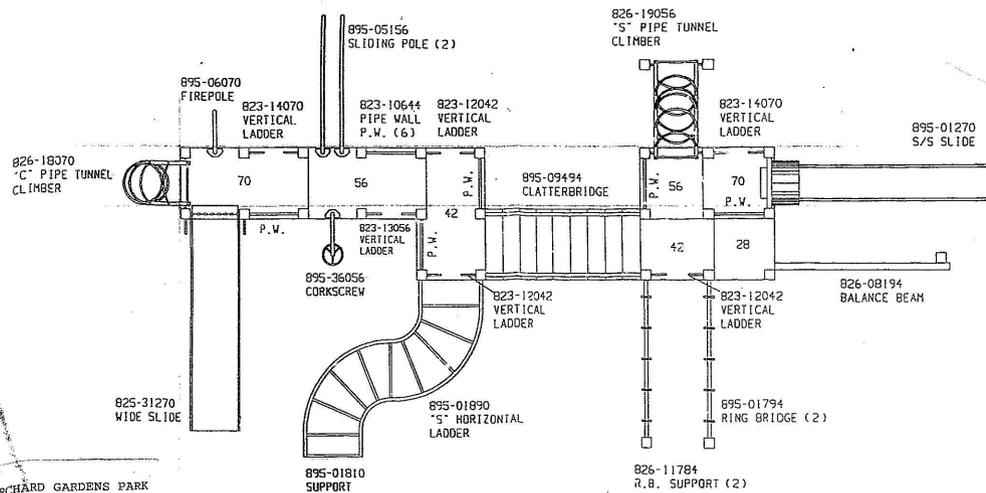


ORCHARD GARDENS PARK
 CITY OF SUNNYVALE
 The play equipment shown for Orchard Gardens Park is fabricated from components of Mexico Forge, Alumacore 2000 with Tenderdeck units as noted by the parts numbers shown on Detail Plan B/3. The listed play equipment and catalog numbers are those as manufactured by Landscape Structures, Mexico Forge of Delano, Minnesota.

These play equipment are considered to be unique in their construction and materials, and for the purposes of bidding, shall be the only manufacturer acceptable for providing this play equipment. No alternative manufacturer will be considered for providing the play equipment for Orchard Gardens Park.



The above conditions apply for both Play Area No. 1, Base Bid, and for Play Area No. 2, Add Alternate #1

(B) **3** **DETAIL PLAN: PLAY EQUIPMENT (BASE BID)**
 SCALE: 1/4" = 1'-0"


ORCHARD GARDENS PARK

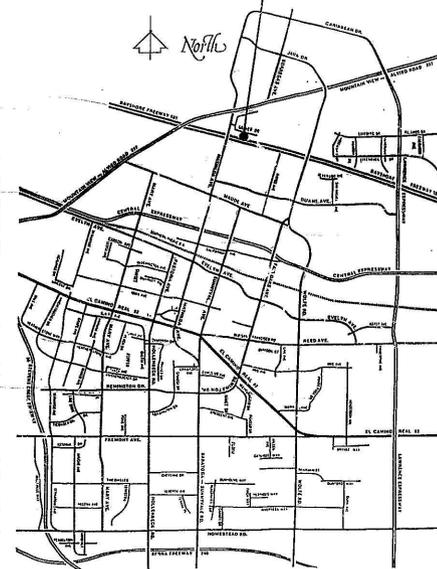

ORCHARD GARDENS PARK

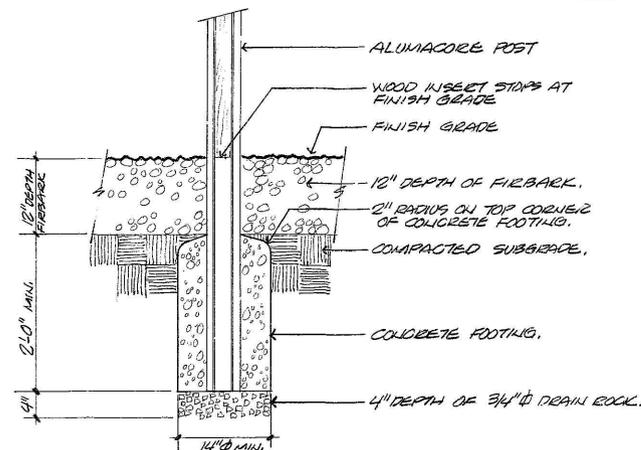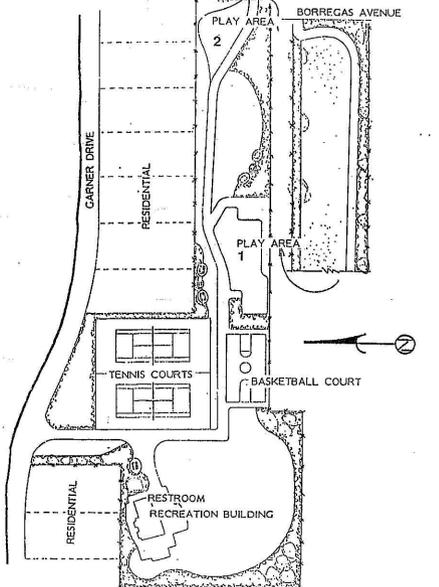

(C) **3** **DETAIL: TYPICAL CONCRETE FOOTING**
 SCALE: 1" = 1'-0"



Harry H. Tsugawa ASLA
Landscape Architect
 133 Calvin Place
 Santa Cruz California
 95060

Phone:
 408/423 2417

Project
 PLAY AREA RENOVATION PLANS
 ORCHARD GARDENS PARK
 GARDNER DRIVE
 DEPARTMENT OF PARKS & RECREATION
 CITY OF SUNNYVALE

PLAY AREA
 NO. 2
 ADD ALT. #1

Revision:

Date: 11/5/80


Certificate No. 1617

Sheet
 4 of 4


ORCHARD GARDENS PARK
 PLAY AREA NO. 2
 ADD ALTERNATE #1

CONSTRUCTION NOTES:

1. Verify the locations and depths of any existing subsurface utilities, services and drainage facilities that may be in conflict with the placement of the new play equipment. The Contractor shall be responsible for the repair and/or replacement of any existing utilities, services or drainage facilities damaged due to failure on the part of the Contractor to verify the locations and depths of such items.
2. Clear all existing firbark from Play Area No. 2 and move to Play Area No. 1. Relocate only clean firbark, free of soil, debris and other contaminants. Dispose of any contaminated firbark off of the site.
3. Install the new play equipment in strict accordance with the manufacturer's specifications. Tops of all concrete footings are to be at proper depths, and the top corners of all concrete footings are to be rounded to a 2 inches minimum radius.
4. Concrete for footings shall be Class A, six (6) sacks concrete.
5. At completion of installation of the play equipment, the play area subgrade shall be cleaned of all rocks, debris and contaminated firbark, and dispose of same off of the site.
6. Establish proper subgrade as required to allow for the placement of a 12 inches minimum depth of sand, with the finish grade of the sand to be 2 inches below the tops of curbs or adjacent paved surfaces. Excavate and remove from the site, any excess subgrade materials as required to allow for the proper depth of sand.
7. After all installation work has been completed, and the proper subgrade established, clean, imported No. 2 Lapis sand shall be placed to a minimum depth of 12 inches into the play area.

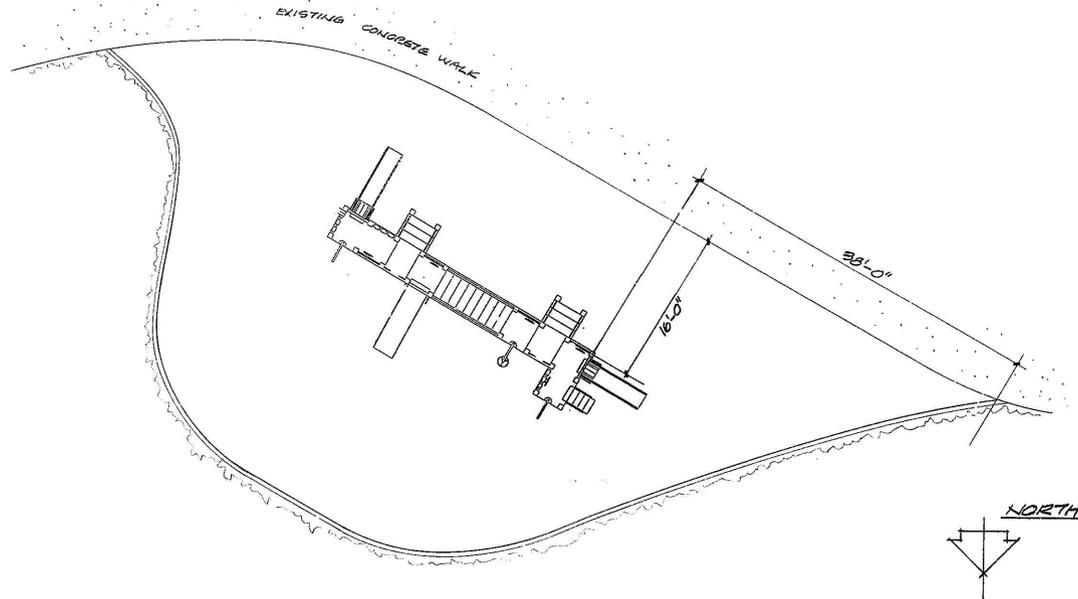

(A) 4 DETAIL PLAN: PLAY AREA 2 (ADD ALTERNATE #1)
 SCALE: 1/8" = 1'-0"

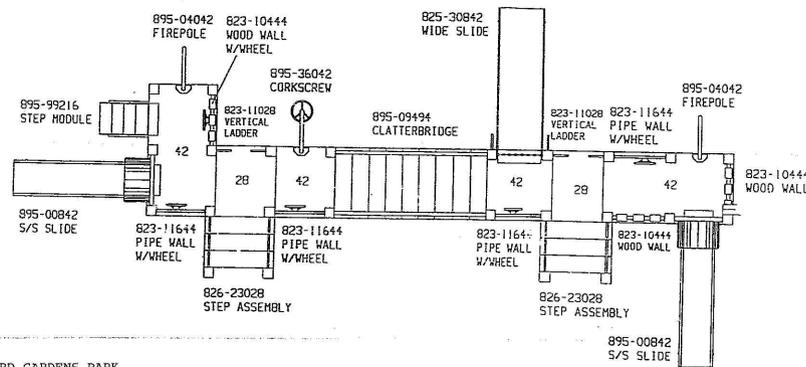

ORCHARD GARDENS PARK
 CITY OF SUNNYVALE

The play equipment shown for Orchard Gardens Park is fabricated from components of Mexico Forge, Alumacore 200 with Tenderdeck units as noted by the parts number shown on Detail Plan B/4. The listed play equipment and catalog numbers are those as manufactured by Landscape Structures, Mexico Forge of Delano, Minnesota.

These play equipment are considered to be unique in their construction and materials, and for the purposes of bidding, shall be the only manufacturer acceptable for providing this play equipment. No Alternative manufacturer will be considered for providing the play equipment for Orchard Gardens Park.

The above conditions apply for both Play Area No. 1, Base Bid, and for Play Area No. 2, Add Alternate #1

(B) 4 DETAIL PLAN: PLAY EQUIPMENT (ADD ALTERNATE #1)
 SCALE: 1/4" = 1'-0"