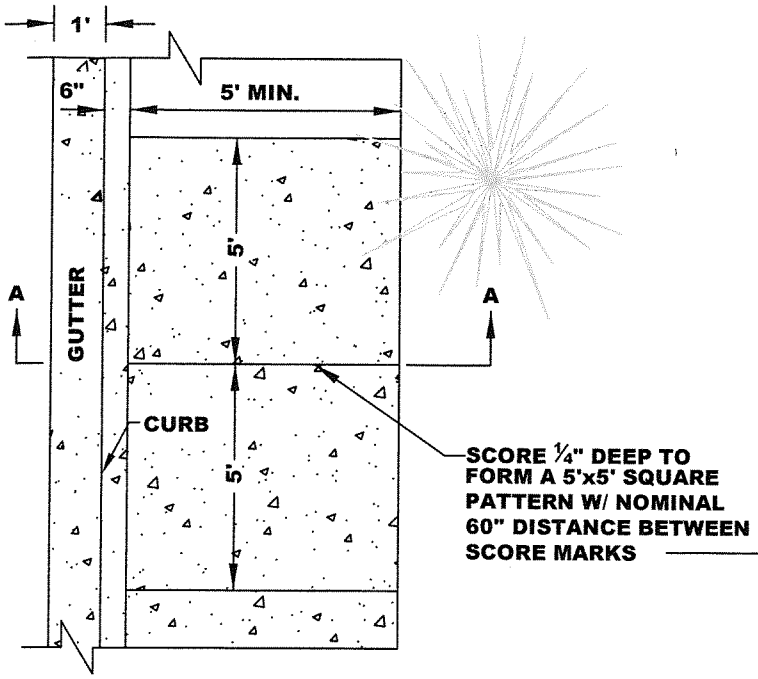

PLAN VIEW
NO SCALE

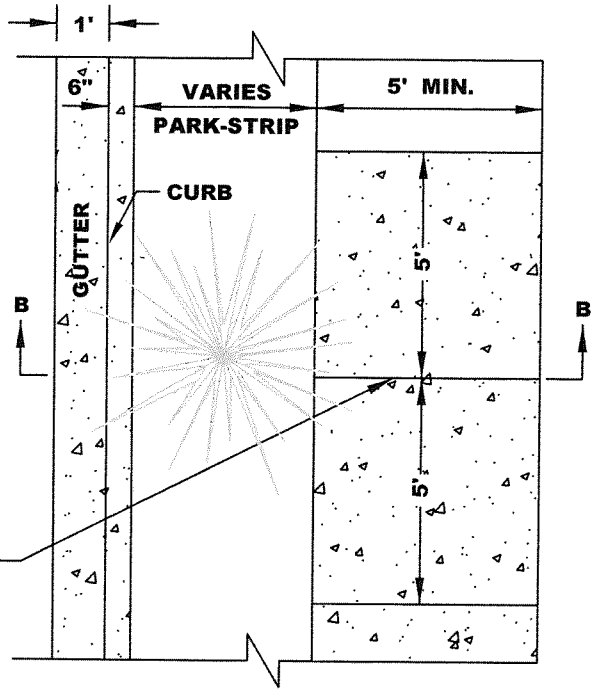

PLAN VIEW
NO SCALE

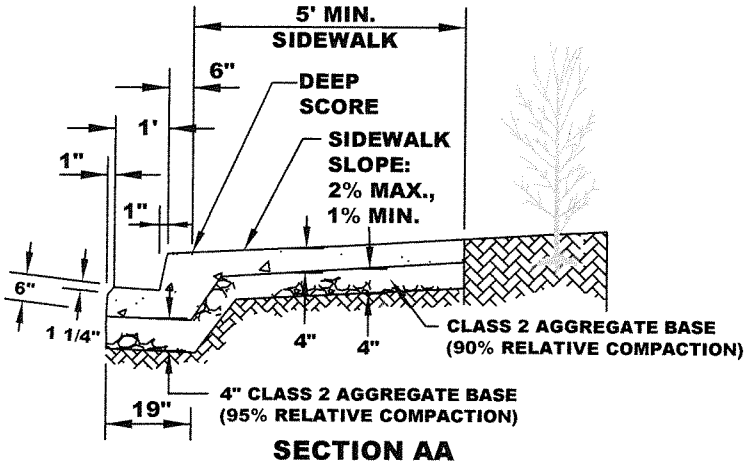

SECTION AA
NO SCALE

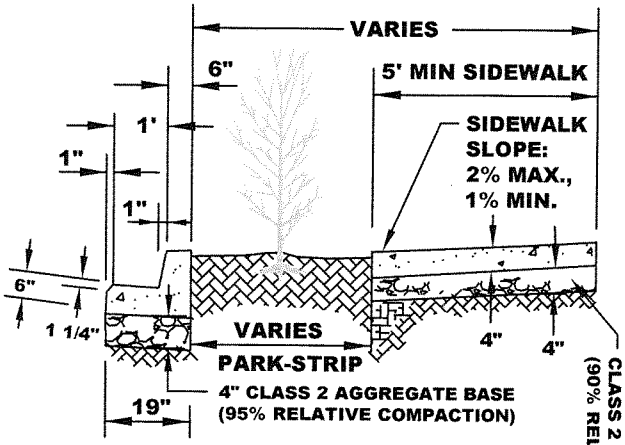

SECTION BB
NO SCALE

SIDEWALK TO MEANDER AROUND EXISTING TREES

NOTE: SEE STANDARD DETAILS 13F & 14F FOR INSTALLATION OF ROOT BARRIER, IF CITY DETERMINES ROOT BARRIER IS NECESSARY.

WHEN REPLACING EXISTING CURB W/ NEW, REPLACE PRE-EXISTING CURB MARKS & PAINT (ESPECIALLY THOSE MARKS IDENTIFYING SEWER OR VALVE FEATURES).
USE 1 PINT LAMPBLACK PER CUBIC YARD OF CONCRETE

EXPANSION JOINT AT EVERY 60 FEET AND DEEP SCORE (1 $\frac{1}{4}$") AT EVERY 10 FEET

FOR NEW CURB AND GUTTER INSTALLATION, SAWCUT 12" AC FROM LIP OF GUTTER AND REMOVE. REPLACE WITH NEW AC DEEP LIFT IN 3" LAYERS TO A TOTAL MIN. DEPTH OF 6" OR TO EXIST. THICKNESS PLUS AN ADDITIONAL 1", WHICHEVER IS GREATER.

NEW SIDEWALK **MAINTAIN EXISTING TREE**	APPROVED BY:	
	DATE : SEPT, 2013 REVISED :	DWG. 9C-5

2013 STANDARD DETAILS